

Time Interval Meter

Features

- Power ON / OFF by rocker switch.
- START & STOP by push button.
- Two line LCD display
- START & STOP mode selection by rotary switch.
- RESET by push button.



Time interval meter measures accurately the time lapse between the two electrical events, e.g., applying voltage, removing voltage, closure of contact, and opening of contact. It is therefore very ideal to measure the response time or transverse time of relays. They can be used for the calibration of timers, time totalizers, time switches, protection relays, and stopwatches.

Technical Specifications

Model	ZMTIMmS			
Input Power Supply	230 V AC, ±10 % @ 50 Hz.			
Measurement Range	0 ms to 1000 Hr			
Display	1) 16X2 Dot Matrix LCD 2) With Hour (999 hr), Min (59 min), Second (59 sec) & Millisecond (999 ms)			
Count on display	999	59	59	999
	Hr	min	sec	ms
Resolution	1 ms			
Mode of Operation 1	For START Pulse 1) Apply DC Voltage (Up to 24VDC Max.) 2) Remove Voltage (Apply 0 V) 3) Closure of contact 4) Open of Contact			
Mode of Operation 2	For STOP Pulse 1) Apply DC Voltage (Up to 24VDC Max.) 2) Remove Voltage (Apply 0 V) 3) Closure of contact 4) Open of Contact			
Measurement Accuracy	For 999 ms ± 0.05% ± 10 Digit, above 999ms ± 0.01%			
Operating Temperature	10°C to 40°C			
Storage Temperature	5°C to 70°C			
Protection	Start & Stop pulses are isolated from each other.			
Dimensions	250mm(W) X 200mm(D) X 180mm(H)			
Weight	5 kg. Approx			

Dimension Details

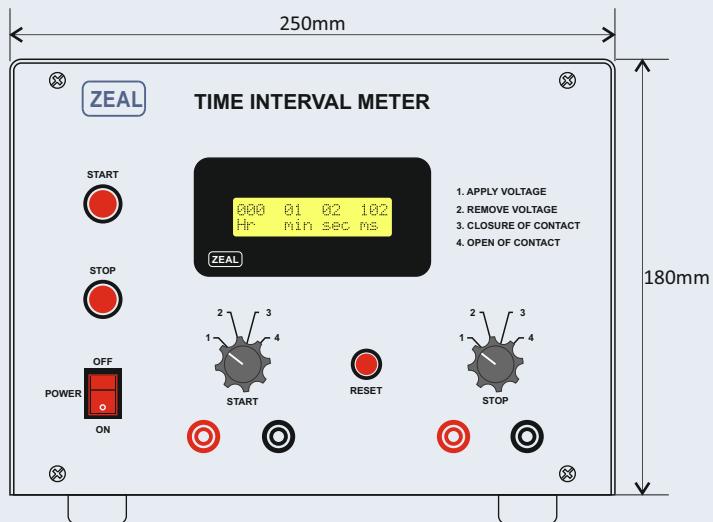


Fig. Front View

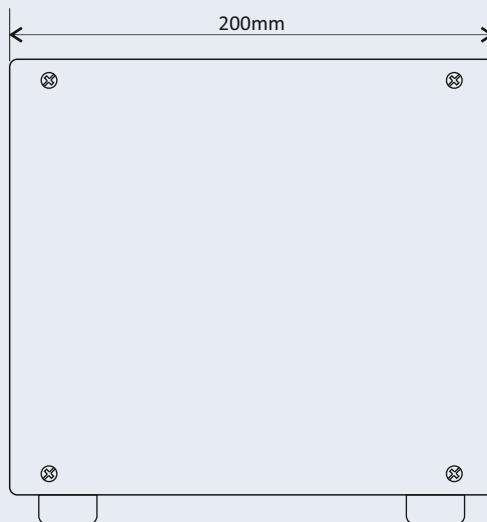


Fig. Side View